

SUPER RECORD TRACK GROUP	pages	22-23
SUPER RECORD TRACK HUBS	page	24
SUPER RECORD TRACK PEDALS	page	25
SUPER RECORD CHAINWHEEL SET - TRACK BOTTOM BRACKET SET	pages	26-27
SUPER RECORD TRACK HEAD SET SUPER RECORD SEAT PINS - FORK ENDS	page	28


4100 CAMPAGNOLO SUPER RECORD TRACK GROUP

(Particular components of this group are illustrated from page 24 to page 28)



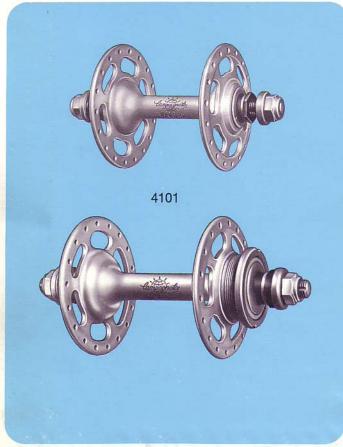

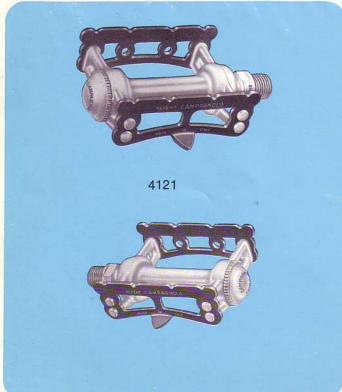

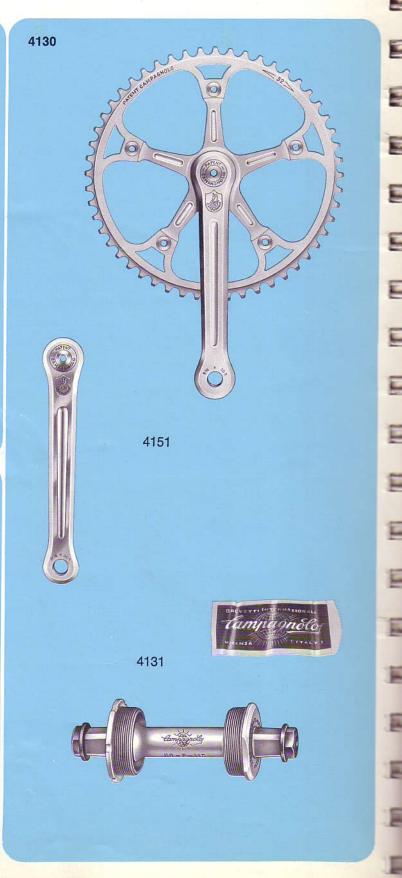





Set track front and rear fork ends 1053 4051 Super Record seat pin. (pin length 147 mm.)
Specify diameter stem: 25 - 25,8
- 26 - 26,2 - 26,4 - 26,6 - 26,8 27 - 27,2 - 27.4 mm.
Pair Super Record large flange

4101 with Titanium spindle track hubs (front width 100 mm., rear width 110 mm., flanges with 36 holes, thread Ø 35 x 24F.). Upon request are furnished with rear hub width 120 mm., flanges with 24 - 28 - 32 - 40 holes, thread Ø 34,7 x 1 M. or Ø 1,370" x 24 Tpi-BSC See alternatives on page 24 Pair Super Record track pedals with Titanium spindle (spindle thread Ø 9/16" x 20F.). The pedals are supplied with unassembled screws and washers with Titanium spindle track hubs

4121 unassembled screws and washers

for fixing toe clips Super Record track chainwheel 4130

Super Record bottom bracket track set with Titanium spindle 4131 (bracket width 70 mm. and cups threaded Ø 36 x 24F.). See alternatives on pages 26-27 Upon request is furnished the bracket safety sleeve ref. 2110 - 2110/1. See page 81

Super Record track head set (thread Ø 25,4 x 24F.).

Upon request are furnished with thread Ø 25 x 1M. or Ø 1" x 24 Tpi-BSC 4141

Super Record track chainset (with cranks 170 mm., pedal hole Ø 9/16" x 20F. and chainring for chain 1/2" x 1/8" (3 mm.)). Specify the number 4151 of teeth of the chainrings available from 44T to 70T. Upon request are furnished cranks with lenghts 165 - 167,5 - 172,5 - 175 -177,5 and 180 mm. and chainrings for chain 1/2" x 3/32" (2 mm.) P.S. For the sprockets see page 81

4101 Pair Super Record large flange track hubs with Titanium spindle and nuts (front width 100 mm., rear width 110 mm.. flanges with 36 holes, thread \varnothing 35 x 24F.). Upon request are furnished with rear width 120 mm., flanges with 24 - 28 - 32 - 40 holes, thread Ø 34,7 x 1M. or Ø 1,370" x 24 Tpi-BSC Super Record large flange front 4102 track hub

track hubs with Titanium spindle and nuts (front width 100 mm., rear width 110 mm., flanges with 36 holes, thread Ø 35 x 24F.). With 36 holes, thread \$2.35 x 24F.).

Upon request are furnished with 24 - 28 - 32 - 40 holes, thread \$\alpha\$ 34,7 x 1M. or \$\alpha\$ 1,370" x 24 Tpi.BSC Super Record small flange front 4105 track hub


Pair Super Record small flange


4104


4103 Super Record large flange rear

track hub

4106 Super Record small flange rear track hub

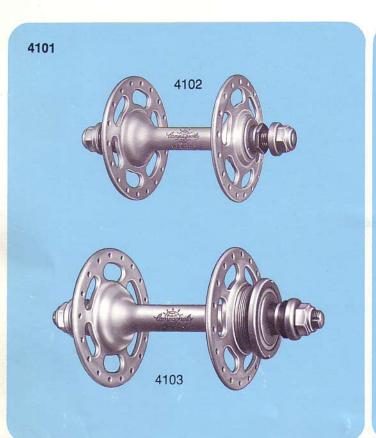

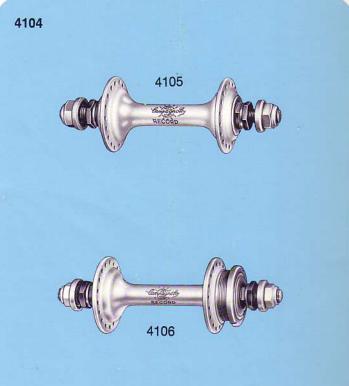


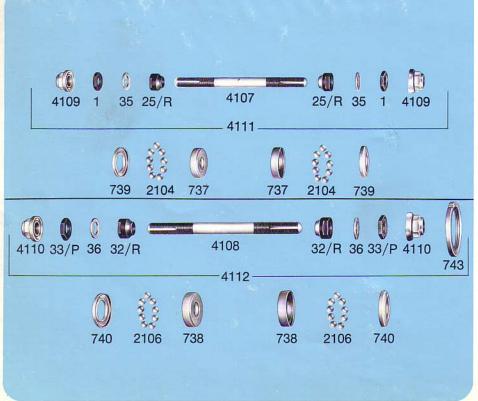


Front lock nut 25/R Front cone 32/R Rear cone 33/P Rear lock nut for track hubs Front hub lock washer Rear hub lock washer Front ball cup 737 Rear ball cup 738 Front dust cover 739 740 Rear dust cover 743 Track lock ring Set (9+9) special \emptyset 7/32" balls selected with 1/1000 of mm. 2104 tolerance 2106 Set (9+9) special Ø 1/4" balls selected with 1/1000 of mm. tolerance 4107 Front Titanium axle for Super Record track hub
Rear Titanium axle for Super 4108 Record track hub 4109 Titanium lock nut for Super Record track front hub 4110 Titanium lock nut for Super Record track rear hub Complete front axle for Super 4111 Record track hub 4112 Complete rear axle for Super Record track hub

Pair Super Record track pedals
with Titanium spindle
(spindle thread ∅ 9/16" x 20F.).
The pedals are supplied with
unassembled screws and
washers for fixing toe clips
Locking screw for superlight
pedals
Pedal axle washer
Pedal axle lock nut
Toe clip washer
Inner dust cap
Pedal dust cap

4122 Super Record right hand track pedal Super Record left hand track 4123 pedal Super Record right hand Titanium pedal spindle Super Record left hand 4024 4025 Titanium pedal spindle 4026 Inserted pedal race (available also in oversize) 4027 Pedal axle cone Set (64) special Ø 1/8" pedal 4028 balls selected with 1/1000 of mm. tolerance

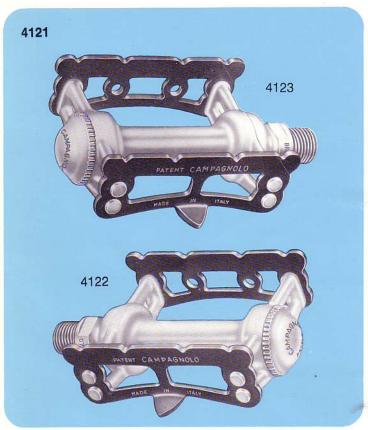

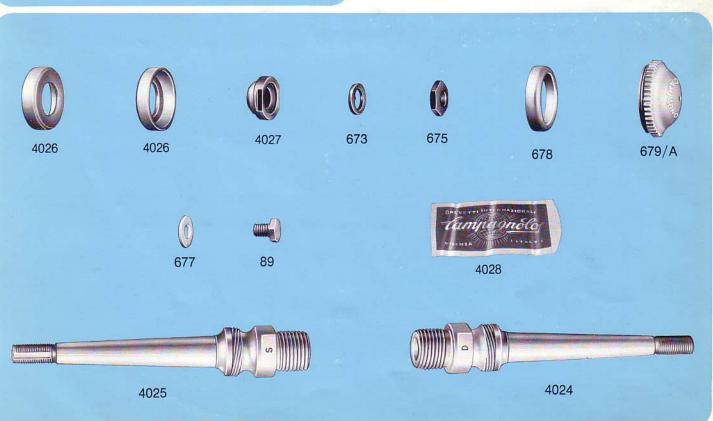

Super Record track chainwheel

4130

4131

4151


Super Record bottom bracket track set with Titanium spindle (bracket width 70 mm. and cups threaded Ø 36 x 24F.). Upon request is furnished the bracket safety sleeve ref. 2110/2110/1. See page 81 Super Record track chainset

chainring for chain 1/2" x 1/8" [3 mm]). Specify the number of teeth of the chainring available from 44T to 70T. Upon request are furnished cranks with lenghts 165 - 167,5 - 172,5 - 175 - 177,5 and 180 mm. long and chainrings for chain 1/2" x 3/32" (2 mm.). Lockring with normal 3.5 mm. thickness (available also with 4 mm. and 4.5 mm. thickness)

(with cranks 170 mm., pedal hole Ø 9/16" x 20F. and

747

4130 4131 4151

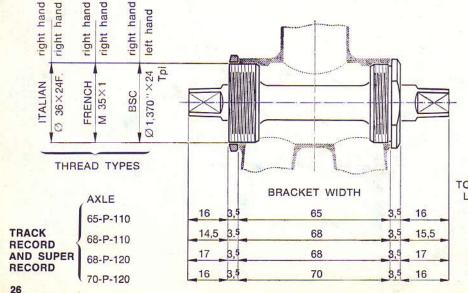

Details of bracket number:

- The first number indicates the bracket width
- indicates track
- SS indicates road
- indicates cross
- Number 110 or 120 indicates the suggested width of the rear hub for a perfect chain alignment (see pages 92-93)

UPON REQUEST WE SUPPLY THE CUPS WITH THREAD INCREASED BY 0,5 mm.

TOTAL AXLE 104 mm. 105 mm. 109 mm. 109 mm.


Fixing screw Fixing washer Crank cover plate Track right hand crank (complete with cover 756, 170 mm. long). Upon request are furnished the following sizes: 165 - 167,5 - 172,5 - 175 - 177,5 and 180 mm. long Track left hand crank


749

(complete with cover 756, 170 mm. long). Upon request are furnished the following sizes: 165 - 167,5 - 172,5 - 175 - 177,5 and 180 mm. long Super Record track chainring for 1/2" x 1/8" (3 mm.) chain. Specify the number of teeth available from 44T to 70T 760/A 761 Track chainwheel fastening screw

Track chainwheel fastening nut Set (14+14) special Ø 3/16" b/b balls selected with 1/1000 of mm. tolerance Super Record cotterless Titanium track spindle. See measurements and indicate spindle size Fixed cup. Indicate required thread 4035 4132 4133 thread Adjustable cup. Indicate required 4134 thread

762

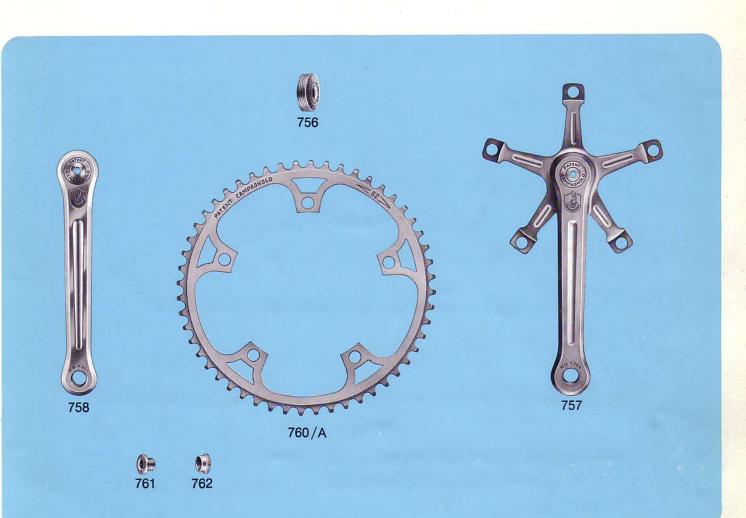

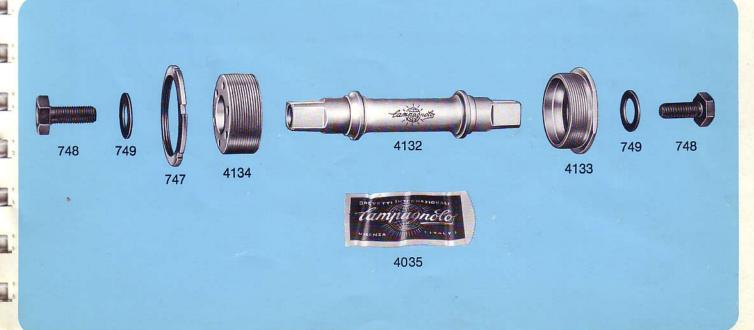

4141	Super Record track head set (thread Ø 25.4 x 24F.).	4043	(specify type of threading) Super Record locking washer
	Upon request are furnished with	4052	Left hand side support
	thread Ø 25 x 1M, or	4053	Right hand side support
-	1" x 24 Tpi-BSC	4054	Front bracket
4051	Super Record seat pin.	4055	Rear bracket
1001	(pin length 147 mm.)	4056	Fixing and adjusting bolt
	Specify diameter stem: 25 - 25,8	4057	Bolt nut
	- 26 - 26.2 - 26.4 - 26.6 - 26.8 -	4142	Super Record track screwed ra
	27 - 27,2 - 27,4 mm.		(specify type of threading)
664	Right and left hand track fork	4143	Super Record track top head
	ends		race (0,5 mm. larger gauge
665	Right and left hand track fork		available)
000	ends	4144	Super Record track bottom he
2102	Set (25+25) special b/b		race (0.5 mm. larger gauge
2102	Ø 5/32" balls selected with		available)
	1/1000 of mm. tolerance	4145	Super Record track crown race
4042	Super Record locking nut		(smaller diameter available)
7072	Caper riccord rooking hat		(4.1.2.1.2.1.2.1.2.1.2.1.2.1.2.1.2.1.2.1.



